


# SPOTtops®

## Data

Color/Illumination	Fluorescent Yellow/Green
Diameter (Height)	4"OD (6", 8"); 6"OD (6", 8", 12")
Visibility (Distance)	Max: 100'
Charge Time	Max: 30 min. (5ftcandle light)
Glowing For	6-8 hours
Life Expectancy	Color: 1 year <sup>1</sup> Glow: 25+ years
Construction (Material)	Vinyl with UV inhibitor <sup>1</sup>
Discipline	Dip Molding
Hardness Shore	70 +/- 5
Tensile Strength	1770 psi
Elongation	375% +/- 35
Tear Strength	275 ppi
Specific Gravity	0.98 - 2.0
High Service Temperature	500°F for 5 minutes
Low Service Temperature	*-20°F
Dielectric Strength	Max. 500 volts/mil @ 25 mils (19,700 MV/m @ 0.635 mm)
Flammability	Self-extinguishing
Abrasion Resistance	Excellent
Impact Resistance	Excellent

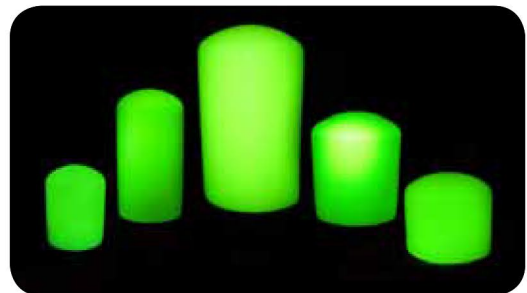

Diameter	Height	Color/Illumination	Code
4.5" (OD)	6"	Yellow/Green	ST-406YG
4.5" (OD)	8"	Yellow/Green	ST-408YG
6.625" (OD)	6"	Yellow/Green	ST-606YG
6.625" (OD)	8"	Yellow/Green	ST-608YG
6.625" (OD)	12"	Yellow/Green	ST-612YG



1. Product not recommended for use in direct sunlight. Color may fade, but will continue to glow as bright or brighter

## Technical Data Sheet SPOTtops

Denmac Industries  
7616 E. Rosecrans Ave  
Paramount, CA 90723  
562-634-2714  
www.denmac-ind.com

